

40 tm
NEW AGE




RADIOCONTROL

7401C
7441C

Ferrari

PASSION FOR LIFTING


7401C - 7441C Technical data

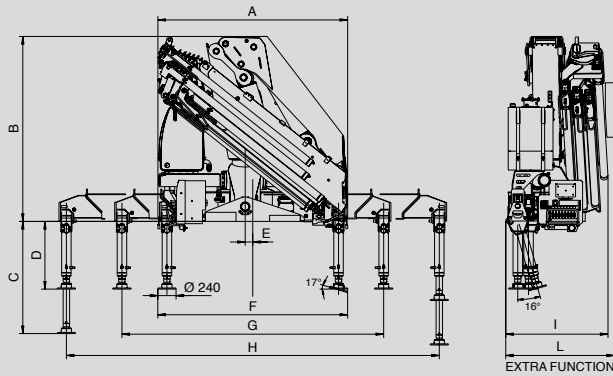

A2	kg 11845*	7895	5695	4325	3255	2525	1965	1550		7401C
	m 2,95	4,40	6,07	7,97	10,05	12,10	14,25	16,35		
	kg 12810*	8565	6170	4695	3495	2725	2130	1695		7441C
	m 2,95	4,40	6,07	7,97	10,05	12,10	14,25	16,35		
A3	kg 11540*	7630	5440	4095	3255	2525	1965	1550	1205	7401C
	m 2,95	4,45	6,15	8,05	10,05	12,1	14,25	16,35	18,67	
	kg 12355*	8170	5835	4385	3495	2725	2130	1695	1330	7441C
	m 2,95	4,45	6,15	8,05	10,05	12,1	14,25	16,35	18,67	
A4	kg 11355*	7400	5230	3880	3055	2525	1965	1550	1205	7401C
	m 2,95	4,50	6,17	8,1	10,1	12,10	14,25	16,35	18,67	
	kg 12080*	7905	5605	4175	3285	2725	2130	1695	1330	7441C
	m 2,95	4,50	6,17	8,1	10,1	12,10	14,25	16,35	18,67	
A5	kg 11060*	7105	4995	3670	2840	2320	1965	1550	1205	7401C
	m 2,95	4,58	6,25	8,15	10,15	12,15	14,25	16,35	18,67	
	kg 11845*	7620	5370	3960	3080	2520	2130	1695	1330	7441C
	m 2,95	4,58	6,25	8,15	10,15	12,15	14,25	16,35	18,67	
A6	kg 10870*	6965	4835	3510	2680	2155	1790	1550	1205	7401C
	m 2,95	4,58	6,25	8,15	10,15	12,15	14,25	16,35	18,67	
	kg 11650*	7470	5220	3795	2910	2345	1965	1695	1330	7441C
	m 2,95	4,58	6,25	8,15	10,15	12,15	14,25	16,35	18,67	
A7	kg 10675*	6615	4585	3295	2490	1975	1625	1375	1205	7401C
	m 2,95	4,75	6,45	8,35	10,35	12,35	14,45	16,55	18,67	
	kg 11440*	7100	4950	3580	2720	2170	1785	1520	1330	7441C
	m 2,95	4,75	6,45	8,35	10,35	12,35	14,45	16,55	18,67	
A8	kg 10525*	6525	4450	3155	2350	1835	1475	1230	1060	7401C
	m 2,95	4,75	6,45	8,35	10,35	12,35	14,45	16,55	18,7	
	kg 11225*	6970	4785	3440	2580	2025	1645	1375	1190	7441C
	m 2,95	4,75	6,45	8,35	10,35	12,35	14,45	16,55	18,7	

*)Theoretical lifting capacity

Jib version also available - Contact us for detailed information



Recommended truck:
7401C - G.V.W. ton 32
7441C - G.V.W. ton 32



Fili FERRARI

Via Einstein, 8
 42028 Poggio (RE) Italy
 Tel. +39 0522/486308
 Fax +39 0522/486330
 info@filiferrari.it
 marketing@filiferrari.it
 www.filiferrari.com



Quality and environmental
 certified

	A2	A3	A4	A5	A6	A7	A8
A	2500	2500	2500	2500	2500	2500	2500
B	2440	2440	2440	2440	2440	2440	2440
C	1478	1478	1478	1478	1478	1478	1478
D	892	892	892	892	892	892	892
E	100	100	100	100	100	100	100
F	2500	2500	2500	2500	2500	2500	2500
G	6000	6000	6000	6000	6000	6000	6000
H	7600	7600	7600	7600	7600	7600	7600
I	1250	1250	1250	1250	1250	1350	1350
L	1310	1310	1310	1310	1310	1390	1390

	Lifting Moment	Stewing Angle	Working pressure	Oil tank capacity	Max Oil flow	Max lifting height	Standard crane weight
	tm	°	bar	l	l/min	m	kg
7401C							
A2	34,7	430	325	230	100	12,0	3850
A3	34,0	430	325	230	100	14,0	4080
A4	33,3	430	325	230	100	16,0	4300
A5	32,5	430	325	230	100	18,2	4510
A6	31,9	430	325	230	100	20,3	4700
A7	31,4	430	325	230	100	22,6	4880
A8	31,0	430	325	230	100	24,8	5050
7441C							
A2	37,7	430	345	230	100	12,0	3850
A3	36,4	430	345	230	100	14,0	4080
A4	35,6	430	345	230	100	16,0	4300
A5	34,9	430	345	230	100	18,2	4510
A6	34,2	430	345	230	100	20,3	4700
A7	33,7	430	345	230	100	22,6	4880
A8	33,1	430	345	230	100	24,8	5050

Standard

Designed in accordance with EN12999

Design class: HC1-HD4 for model 7401C

Design class: HC1-HD5 for model 7441C

- Multifunctional radio remote control (7441C)
- Sauer Danfoss PVG32 (7441C)
- Hydrocontrol HCD4 (7401C)
- Flanged valves
- Oil tank
- Hydraulically extendable stabilizers
- Fixed stabilizer cylinders
- Swivel stabilizer foot
- Centralized greasing system
- EQS Extension Quick System
- SDV Smooth Descent Valve
- Red Power
- P-PB Proportional Power Boost (7441C)
- F3XL Crane control system (CE)

Dealer

Data, descriptions, and illustrations pertain only and uniquely to models sold at the time of printing of this brochure. After the date of printing, this information is purely indicative and not binding upon Fili Ferrari. Future modifications are solely at the discretion of Fili Ferrari and are always in compliance with applicable and pertinent safety standards. To obtain updated data, descriptions, and illustrations, contact the manufacturer or your reseller. Cranes manufactured and/or marketed by Fili Ferrari.